

# FIRE HYDRANT EQUIPMENTS



14

## Fire Hydrant Valve-GM

### Product Specification

- Fire Hydrant Valve (Oblique Type, Landing Valve)
- Single outlet landing valve having 75mm NB inlet & 63mm Female Inst. outlet. Material of construction
- Gunmetal IS: 318 LTB2, Inlet : Flanged , Outlet
- Generally female instantaneous. (Male Inst. outlet available on request)
- With PVC blank cap. Complete in all respects.
- With Pull out type / Twisting type Plug.
- With ISI: 5290 marked Type -A



FHE113

## Fire Hydrant Valve-SS

### Product Specification

- Fire Hydrant Valve S.S.(Oblique type, Landing valve)
- Stainless Steel 63mm Single Headed Hydrant Valve as per IS: 5290, Type-"A" ISI Marked
- With PVC Blank cap & Chain. W/O Nuts & Bolts.
- Single outlet landing valve having 75mm NB inlet & 63mm Female Inst. outlet. Flange dia OD:200, PCD:160,
- Material of construction: SS 304, Inlet : Flanged , Outlet : Generally female instantaneous.



FHE112

## Double Control Fire Hydrant Valve-GM

### Product Specification

- 63MM double controlled hydrant valve 100mm NB Inlet & 63mm , 2 nos. Female instantaneous outlet as per IS : 5290 type B



FHE113-A

## Male Female Coupling-SS

### Product Specification

- Stainless Steel Male/female coupling of 63 mm dia with ISI: 903 marked complete in all respects.

MoC ; SS - 304



FHE116-SS

## Triple Purpose Nozzle-SS

### Product Specification

- Triple Purpose Nozzle: 63 mm Dia - SS (Stainless Steel)
- FEATURES & BENEFITS :
- Jet - Spray- Shut off Nozzle
- 2½" Male Instantaneous (63 mm)
- MOC - SS
- 150 PSI Max.
- Natural Polished
- The Triple purpose nozzle gives the operator choice of three operations i.e. jet, spray and shut-off.
- APPROVAL : IS: 2871



FHE126-SS

## Short Branch Nozzle-SS

### Product Specification

- Short Branch Nozzle : 63 mm Dia- Stainless Steel
- Inlet Connection : 2 ½" (63mm) Male Instantaneous
- Material : Stainless steel –SS304
- Operating Pressure : 150 PSI Max
- Flow : 65 GPM @ 100 PSI
- Finish : Natural Polished
- As per IS: 903, ISI Marked



FHE124-SS

## Fog Nozzle 63 mm-GM

### Product Specification

- Gun Metal 63 mm Fog Nozzle
- Fog nozzle, gunmetal, 63 mm male inst. Inlet conforming to IS:903 having arrangement for straight stream, high pressure fog and shut off, Chromium plated, conforming to IS:952



N-FN-01

## Water Foam Monitor, CS Stand Post

### Product Specification

- AAG make CS Stand Post type Water Foam Monitor 75mm Barrel made of Carbon Steel pipes and elbows as per IS: 1239 having 100mm Flanged Inlet with a flow capacity of 2580lpm@7kg/cm<sup>2</sup> as per IS:- 8442 type "I" ISI Marked.
- GUN METAL Swivel Joints and AL. ALLOY Aqua Foam Nozzle.



FHE216

## Water cum Foam Monitor

### Product Specification

- Newage Water-Foam Monitor with Aluminium Alloy foam barrel water cap. 2580 L.P.M. with Multi Nozzle with wet, spray & foam application made out of IS:11428 seamless steel tubes, hot dip galvanised.
- 100mm N.B. flanged inlet welded to 80 mm reducer, IS:318 LTB2 gunmetal ball bearing swivel joints with brass locking arrangement, permitting of 360 degrees horizontal.
- 80 to -45 degrees vertical traverse, complete with Aluminium Alloy foam barrel water cap. 2580 l.p.m. at 7kg/cm<sup>2</sup> pressure, having horizontal throw of 60mtrs for water and 50mtrs for foam bearing IS: 8442 mark.



FHE158

## Foam Making Branch Pipe - FB5X

### Product Specification

- Aluminum alloy body, light weight, having 63mm male inst. inlet, 225 LPM foam-water solution capacity at 7kg/cm<sup>2</sup>, complete with pick-up tube.



FHE102

## Foam Making Branch Pipe - FB10X

### Product Specification

- Foam making Branch pipe FB-10X having 63mm Inst inlet with 450LPM@7Kg/cm<sup>2</sup> foam water solution capacity as per IS:- 2097 with Pick up tube.



FHE133

## Hand Controlled Branch Pipes

### Product Specification

- Newage NI-201 Multipurpose Hand Controlled Branch Pipes
- Nozzle Bore:9.5 mm
- Inlet Size:63 male Inst. BS:336 & IS : 903
- Hydro Test Pressure : 23 Kg/Cm<sup>2</sup>
- Weight:1.35 Kg.
- Working Pressure:7 Kg/Cm<sup>2</sup>
- Flow:150 LPM
- Throw : JET-25 Meters & SPRAY - 15 Meters & Spray Width - 2.5 Meters



N1-201



## Pyroprotect Brand Fire Hose Pipe

### Product Specification

- Newage PYROPROTECT brand non percolating Type B, 15 Mtrs FHP with GM M/F couplings.
- Flexible fire fighting delivery hose, three layered synthetic jacketed, with elastomeric outer covering, resistant to liquids, chemicals, acids, alkalis, solvents, abrasion & heat, having 42kg/cm<sup>2</sup> burst pressure, 25kg/cm<sup>2</sup> proof pressure, 18kg/cm<sup>2</sup> working pressure, bearing IS:636-1988, 63mm inside dia duly copper wire bounded to fire hose instantaneous type, 63mm size, pair of M/F female parts, heavy duty, bearing IS:903 mark.



FH-PY-63-15-GM

## Fire Hose Pipe, GM Coupling

### Product Specification

- Torrent Armor Brand Non Percolating Type-B 7.5/15/30 Mtr. Fire Hose Pipe with GM Coupling and Copper Wire Binding
- As per IS : 636 – 1988 Type B (ISI Mark)
- Proof Pressure : 22 bar
- Burst Pressure : 36 bar
- With Gun Metal Male Female Instantaneous type Couplings As IS:903 ISI Mark, banded with copper wire
- Size : 63 mm x 15 Mtr.Length.
- Approved By : IRS (Indian Registration of Shipping)



FHE109-GM

## RRL Type-A Fire Hose Pipe

### Product Specification

- Torrent Brand RRL Type-A 7.5/15/30 Mtr. Fire Hose Pipe with GM M/F Coupling and Copper Wire Binding
- As per IS : 636 – 1988 Type A (ISI Mark)
- Proof Pressure : 22 bar
- Burst Pressure : 36 bar
- Gun Metal Male Female Instantaneous type Couplings As IS:903 ISI Mark, banded with copper wire
- Size : 63 mm x 15 Mtr. Length.
- Approved By : IRS (Indian Registration of Shipping)



FHE132-GM

## Wall Mounting Fire Hose Reel

### Product Specification

- Mitras Fire Hose Reel: 884 with 20mm ISI Marked Type-1 30mtr. Hose
- Type: Swinging 180 degree Wall Mounting
- Size: Inlet 20mm (3/4" BSP Thread Size)
- Confirming Specification : IS 884
- Hose Reel Tubing - Thermoplastic Hose
- Hub Sides & Wall Bracket - M.S. Sheet of IS:513



HR-WM-02

## 4 Way Hydrant Inlet Connection

### Product Specification

- Four Way breaching Inlet with Gun Metal N.R.V
- Size : 2 1/2" 4 way having 4 nos. 63mm Male Inst. Inlet with built in NRV & 140mm NB flanged outlet, Rubber Dust Caps.



FHE168-GM

## MCB-Manual Call Box MS Type

### Product Specification

- Manual Call Box, MS Type Model M.S.-II
- Compatible with any make Fire Alarm Panel.
- Manual Call Point as per IS:2189.
- Approved from Maximum Govt. Sectors
- Chain Hammer Facility



MCB-MS-II

## FRP Fire Hose Box (Double Door)

### Product Specification

- FRP Fire Hose Box - DOUBLE Door Type Cabinet
- Fire Hose cabinet wall mounted type, to accommodate 2 length of Type-B, 63mm X 15 mtr. length hose with coupling and 1 No. Nozzle Size of Box : 900 mm (W) X 600mm(H) X 250mm (D)



FHE108-FRP

## MS Fire Hose Box (Double Door)

### Product Specification

- Size: 750mm x 600mm x 250mm
- Material Construction 20 Gauge MS Sheet
- Cabinet to Accommodate 2 No. of 15 Mtr Length Hose Pipe with 1 No. Nozzle
- With double door, panel lock, glass & hose box key, and hose box duly painted with epoxy red colour with reflective sticker



FHE106-MS

## FRP Mobile Foam Trolley Unit

### Product Specification

- FRP Mobile Foam Trolley Unit - 100/150/200 Liters - W/O Foam Solution and Fire Hose Pipe.
- FRP made Mobile Foam Trolley with SS304 made Trolley stand with 500 kg. capacity trolley wheels polymer made & one caster/wheel for easy direction. Aerodynamic FRP tank designing Foam compound with foam making branch Pipe FB10X 450LPM@7KG/cm<sup>2</sup> flow Capacity a per IS:2097, rating in line inductor made of gunmetal & aluminium pickup tube. Heaviest in line inductor compare to all other manufacturer housing on both side of the tank to keep 15 Meter Fire Hose Pipe.



FHE142-FRP




## Fire Buckets Stand, Capacity: 4 nos.

We are dedicatedly involved in providing an excellent quality array of Four Fire Bucket Stand With Roof, for catering the various needs of our clients.

### Product Description:

|              |   |                                 |
|--------------|---|---------------------------------|
| Material     | : | Mild Steel Sheet                |
| Application  | : | Chemical Plant, Safety Industry |
| Height       | : | 5 Feet                          |
| No of Bucket | : | 4                               |
| Finishing    | : | Paint Coated                    |

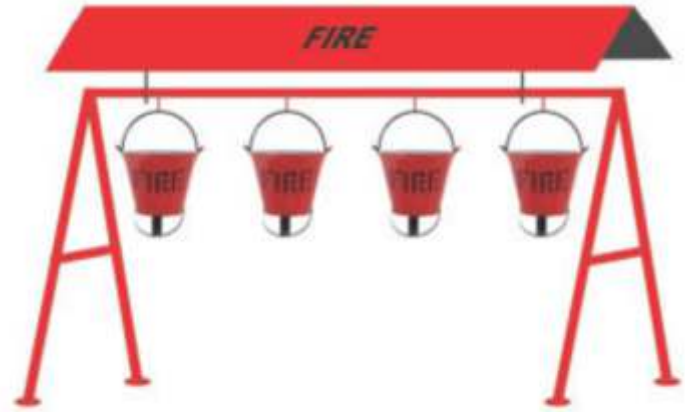

## Fire Buckets, Capacity: 9 Ltr.



### Product Description:

|                      |   |                 |
|----------------------|---|-----------------|
| Type                 | : | BUCKET          |
| Shape                | : | BUCKET          |
| Capacity             | : | 9 LTR           |
| Size                 | : | 9 LTR           |
| Extinguishing Medium | : | GALONIZE        |
| Color                | : | RED             |
| Finishing            | : | POWDER COATED   |
| Weight               | : | 3 KG            |
| Is It Portable       | : | Portable        |
| Usage/Application    | : | SAFETY INDUSTRY |
| Material             | : | GALONIZE        |




## **MARK SAFETY APPLIANCES**

---



Scan QR code to  
download catalogues

 **Regd. Office, Warehouse & Workshop:**  
Plot No. 92, 93, Shah Industrial Park-3 at Kotambi,  
Pin Code 391510, Vadodara-Halol Highway,  
Dist. Vadodara, Gujarat, India.

 02668 299065, 098797 79661

 [info@marksafety.com](mailto:info@marksafety.com)

 [www.marksafety.com](http://www.marksafety.com)

Connect us:     

