

# FIRE & WELDING BLANKETS



15

## NON-ASBESTOS FIRE / WELDING BLANKETS

### Application:

Welding blankets provides protection from sparks, spatter, slags generated by welding or metal cutting application. It has been widely used in many industries include shipbuilding, construction, automotive parts, oil plants, flammable chemicals, and so on.

### Description:

Various treatments and sizes could be fabricated on request. In addition, we can install with eyelets, clips or Velcro on the blankets in order to suit your individual needs. Temperature Resistivity of fire/welding blankets - 240°C to 1260°C


No.	Description of Product	Thickness	Weight	Product Code	Temp.
01	Ceramic Fiber With SS Wire & Vermiculite Coating	3.00 mm	1500 GSM	MS/CVS	1260°C
02	Silica Fiber Product	1.40 mm	1200 GSM	MS/S88	1000°C
03	Mark Carbon Fiber	4.00 mm	650 GSM	MS/CF	900°C
04	E-Fiber Glass with Graphite Coating	1.70 mm	1700 GSM	MS/BLK	850°C
05	E-Fiber Glass with Silicon Coating	1.00 mm	1100 GSM	MS/SI/2G	750°C
06	Heat Treated Fiberglass Fabric with PU Coating	0.45 mm	450 GSM	MS/FG/HT/430/PU	550°C
07	Fire Retardant PVC Coated Fiber Glass Tarpaulin	0.70 mm	800 GSM	MS/FFRP800	430°C
08	Fire Retardant PVC Coated Polyester Tarpaulin	0.70 mm	700 GSM	MS/FRP700	250°C
09	Fire Blanket	0.43 mm	480 GSM	MS/WFBR	550°C
10	Scaffolding Lifting Bag			MS/SLB	

## Mark Ceramic Fiber with SS Wire & Vermiculite Coating



Code No.	Size	Thickness	Weight	Colour	Temperature
MS/CVS	5 mtr. x 4 mtr. 3 mtr. x 6 mtr. 5 mtr. x 6 mtr. 4 mtr. x 3 mtr. 1 mtr. x 1 mtr. 6 mtr. x 4 mtr. 4 mtr. x 4 mtr. 1 mtr. x 2 mtr.	3.00 mm	1500 GSM	Brown	1260°C
<p><b>Size:</b> 1 mtr x 30 mtr/roll  <b>Application:</b> Fire/Welding Blankets/Curtain &amp; Insulation; Welding Booth</p>					

## Mark Silica Fiber Product

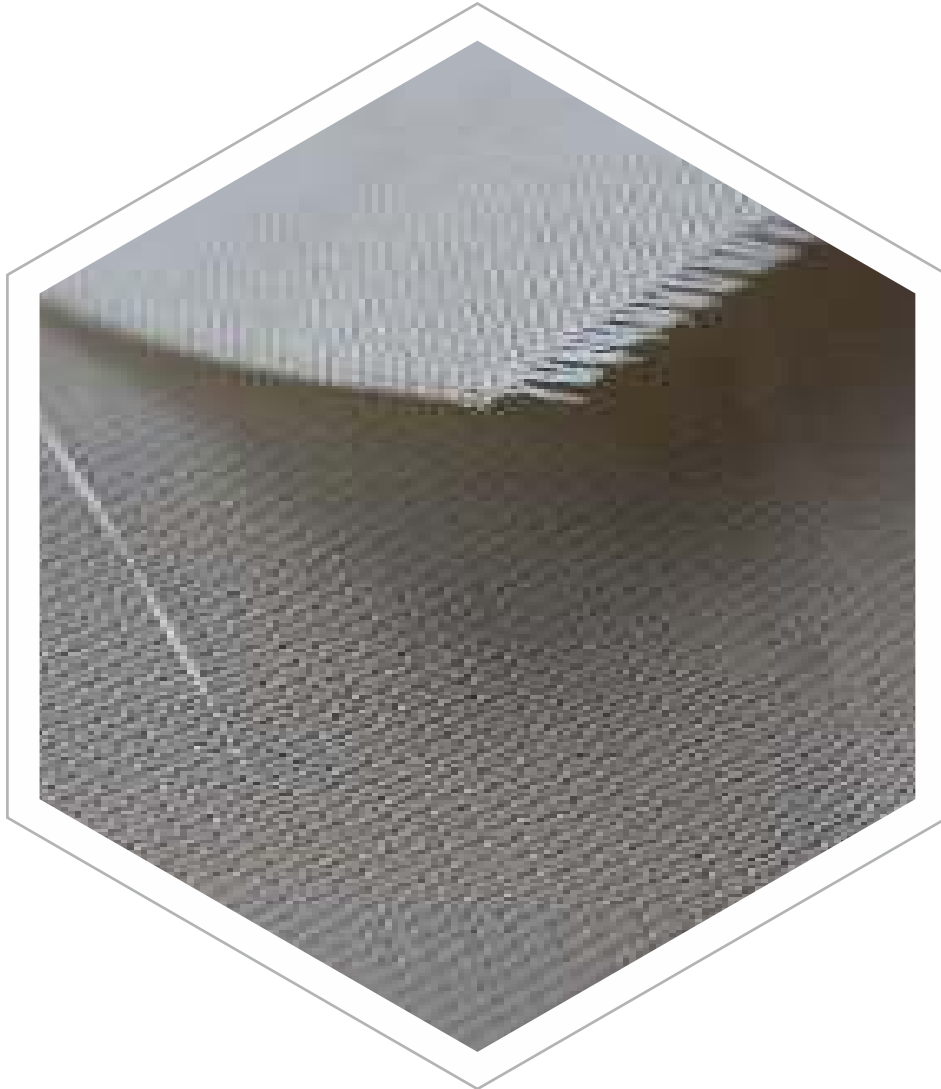

Code No.	Size	Thickness	Weight	Colour	Temperature
MS/S88	5 mtr. x 4 mtr. 3 mtr. x 6 mtr. 5 mtr. x 6 mtr. 4 mtr. x 3 mtr. 1 mtr. x 1 mtr. 6 mtr. x 4 mtr. 4 mtr. x 4 mtr. 1 mtr. x 2 mtr.	3.40 mm	1200 GSM	Gold	1000°C
<p><b>Size:</b> 920 mm x 50 mtr/roll  <b>Application:</b> 100% Itching Free; Welding Safety Welding Blanket/ Curtain</p>					

## Mark Carbon Fiber



Code No.	Size	Thickness	Weight	Colour	Temperature
MS/CF	2 mtr. x 4 mtr. 2 mtr. x 7 mtr. 4 mtr. x 3 mtr. 2 mtr. x 1 mtr. 2 mtr. x 2 mtr. 1 mtr. x 1 mtr. 6 mtr. x 5 mtr. 3 mtr. x 3 mtr. 1 mtr. x 4 mtr.	4.00 mm	650 GSM	Black	900°C

**Size:** 1 mtr x 50 mtr/roll

**Application:** 100% Itching Free, Light Weight Fire/Welding Blankets/Curtain & Insulation

## Mark E-Fiber Glass with Graphite Coating



Code No.	Size	Thickness	Weight	Colour	Temperature
MS/BLK	2 mtr. x 4 mtr. 2 mtr. x 7 mtr. 4 mtr. x 3 mtr. 2 mtr. x 1 mtr. 2 mtr. x 2 mtr. 1 mtr. x 1 mtr. 6 mtr. x 5 mtr. 3 mtr. x 3 mtr. 1 mtr. x 4 mtr.	1.7 mm	1700 GSM	Black	850°C
<p><b>Size:</b> 1 mtr x 50 mtr/roll  <b>Application:</b> Welding Safety Welding Blanket/Curtain</p>					

## Mark E-Fiber Glass with Both Side Silicon Coating



Code No.	Size	Thickness	Weight	Colour	Temperature
MS/SI/2G	2 mtr. x 4 mtr. 2 mtr. x 7 mtr. 4 mtr. x 3 mtr. 2 mtr. x 1 mtr. 2 mtr. x 2 mtr. 1 mtr. x 1 mtr. 6 mtr. x 5 mtr. 3 mtr. x 3 mtr. 1 mtr. x 4 mtr.	1.0 mm	1100 GSM	Silver/Red	750°C
<b>Size:</b> 1 mtr x 50 mtr/roll <b>Application:</b> 100% Water Proof/100% Itching Free Welder Tent/Portable Welding Booth/ Curtain/ Blanket					

## Mark Heat Treated Fiberglass Fabric with PU Coating



Code No.	Size	Thickness	Weight	Colour	Temperature
MS/FG/HT/430/PU	2 mtr. x 4 mtr. 2 mtr. x 7 mtr. 4 mtr. x 3 mtr. 2 mtr. x 1 mtr. 2 mtr. x 2 mtr. 1 mtr. x 1 mtr. 6 mtr. x 5 mtr. 3 mtr. x 3 mtr. 1 mtr. x 4 mtr.	0.45 mm	450 GSM	Golden	550°C
<b>Size:</b> 1 mtr x 50 mtr/roll <b>Application:</b>					

## Fire Retardant Tarpaulins




### **Fire Retardant PVC Coated Fiberglass Tarpaulin**

Non-Conductive  
100% Water Proof

Application: Welder Tent/Portable Welding Booth

Weight : 800 GSM  
Thickness : 0.7 mm  
Temperature : 430° C (Sandwich Fiber Glass Fabric)

*Code No.: MS/FFRP800*

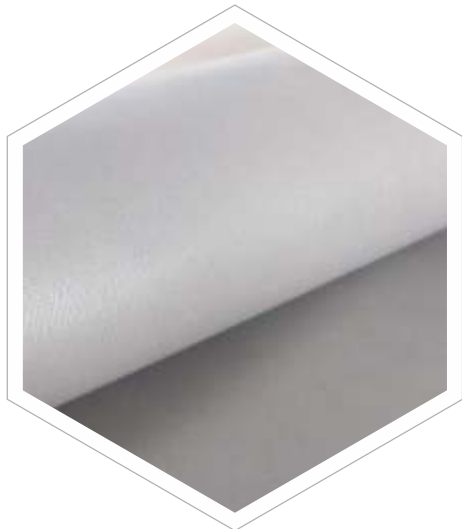

### **Fire Retardant PVC Coated Polyester Tarpaulin**

100% Water Proof

Application: Welder Tent/Portable Welding Booth

Weight : 700 GSM  
Thickness : 0.7 mm  
Temperature : 250° C

*Code No.: MS/FRP700*

## Fire Retardant Tarpaulins



### **Fire Blanket**

CE Standard: EN 1869:1997

Material: 100% fiberglass fabric/fiberglass thread/fire resistant tapes/silicone coating

Size : 1.2 Mtr X 1.8 Mtr  
Weight : 480 GSM  
Thickness : 0.43 mm  
Temperature : 550° C

*Code No.: MS/WFBR*



### **Scaffolding Lifting Bag**

Capacity : 25 Kg/30 Kg  
Load Limit Safety Factor 1:3  
Size: 10" X 16"- 17"

MOC cut resistance coated waterproof fabric.

*Code No.: MS/SLB*



## **MARK SAFETY APPLIANCES**

---



Scan QR code to  
download catalogues

**Regd. Office, Warehouse & Workshop:**  
Plot No. 92, 93, Shah Industrial Park-3 at Kotambi,  
Pin Code 391510, Vadodara-Halol Highway,  
Dist. Vadodara, Gujarat, India.

 02668 299065, 098797 79661

 [info@marksafety.com](mailto:info@marksafety.com)

 [www.marksafety.com](http://www.marksafety.com)

Connect us:     

