

TRAFFIC SAFETY PRODUCTS



30

Plastic Speed Breaker



Code : AXN-PSB-50
Size : 350 W x 250 L x 50 H (MM)
End Cap : NA

Convex Mirror



Code : AXN-CM-POLYCARONATE
Size : 18" / 24" / 32" / 40" / 48"

Quarter / Half / Full Dome Mirror

Quarter



QDM

Half



HDM


Full



FDM

Code : AXN-QDM / HDM / FDM
Size : 18" / 24" / 26" / 32" / 36"

Truck Wheel Chock

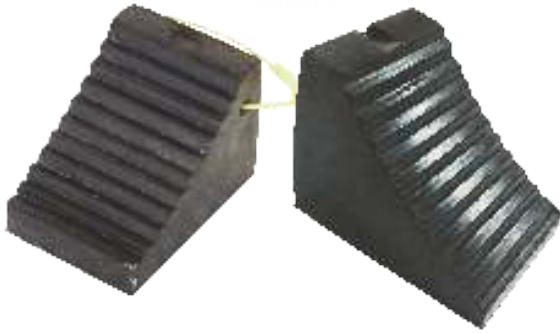

Code : AXN-TWC-H
Size : 160 W X 240 L X 190 H (MM)

Spring Post



SP-1000 SP-900 SP-RIBS-750 SP-300

Code : AXN-SP
Size : 1000 / 900 / 750 / 300 (MM)

Road Studs



Code : AXN-RS-Y/R-W/R-Y/Y
Material : ABS/PC
Color : White / Yellow / Red

Solar Road Studs

With Shank



With Out Shank



Code : AXN-SSS-R/Y
Color : Red / Yellow

UVSM



Code : AXN-UVSM
Size : 11" / Telescopic Pole
ACC : Torch / Wheel

JACKET



Code : AXN-RSJ
Size : 1" / 2" Reflective

Q - Manager




Code : AXN-QM
Color : Blue / Black / Red

Water Fillable Barrier




Code : AXN-P2M-WFB-RED / YELLOW
Size : 580 W X 2000 L X 1000 H (MM)

Jersey Barrier

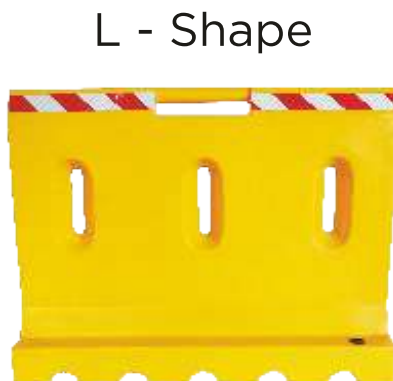

Code : AXN-P-NJLSB / YELLOW
Size : 350 W X 1000 L X 750 H (MM)

Expandable Barrier

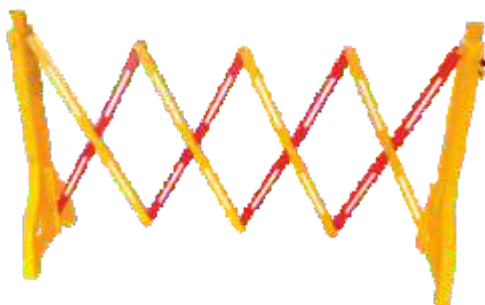

Code : ANX-FEB-Y-B/Y-R
Length (Open) : 2.54 mtr. (100")
Length (Close) : 10"
height : 0.94 Mtr. 3'1" (37")
Weight : 6.85 kg (after water fill)



Floor Stand



Code : AXN-PFS
Color : Yellow (Plain/Printed)

Plastic Base Hexagonal Traffic Cone



Code : AXN-PBTC-HEXA-750
Material : Virgin Grade LLDPE material
Height : 750 mm
Base Size : 420 Dia
Reflective Sleeves: 2 nos. (2" + 4")
Weight : 1.75 kg
Sand filling weight: 3.500 kg



Code : AXN-PBTC-HEXA-1000
Material : Virgin Grade LLDPE material
Height : 1000 mm
Base Size : 420 Dia
Reflective Sleeves: 2 nos. (2" + 6")
Weight : 2 kg
Sand filling weight: 4.750 kg

D Type Rubber Dock Bumpers




Code : AXN-RBD-D-TYPE-500
Size : 150 X 150 X 500 / 1000 L (MM)

Spark Arrestor (Muffler) LMV, HMV (PESO Approved)

USE FOR WITH SIZES

These Spark Arrestors are so designed that they can be easily used on any Tanker Trucks / Lorries. It's fitting and cleaning are simple and easy. Does not affect engine power, parts or over-heat. Does not create back pressure in exhaust system.

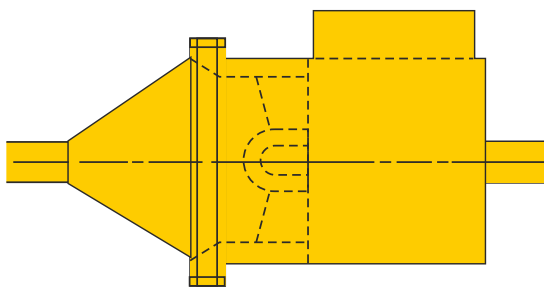

Product Description:

	Size	Code
Three wheel tempo (Atul Sakti etc...)	Size 1.0"	IHP003
Four Wheel (Alto, zen , 800 etc...)	Size 1.5"	IHP003
Zip (All types) , Fork lift , Hyundai santro, Tractor (All), Tavera ,Qualis , Innova , Tata - 407 , Eisher (Old) etc...	Size 2.0"	IHP003
Tata - 1012, 1016,1018,709,Eisher (New) , Swaraj Majda , Ahshok Leyland (10 tyre) etc....	Size 2.5"	IHP004
Tata - 1022,2212,2226,2230, Ashok Leyland (12 Tyre) , 1224 etc..	Size 3.0"	IHP004
Tata - 3026 ,2634, JCB , Terax Vectra etc	Size 3.5"	IHP004
Tata 3118 Etc.....	Size 4.0 "	IHP004

Following sizes Spark Arrestor as per requirement (Non Approved)

USE FOR WITH SIZES

Crane , earth movers , Heavy Machinaries..... size 4.5",5.0",5.5",6.0",	Size 6.5"7.0"
Crane , earth movers , Heavy Machinaries..... size 7.5",8.0",8.5",9.0"	Size 9.5"
Crane , earth movers , Heavy Machinaries..... size 10.0",10.5",11.0"	Size 11.5",12.0"

Spark Arrestor (PESO Approved)



Features & Details:

- Working principle: The fumes coming out of diesel vehicles can cause fires in hazards areas due to unburnt carbon particles sparks. To extinguish these sparks the fumes are passed through the spark arrester and through LM 4 casting.
- Due to high velocity the gases get swirled and the sparks strike the inner wall of the body and get quenched. The quenched carbon particles get collected in Ash box and can be periodically removed. The gases coming out are totally free from spark.
- Available in 6 models to suit all types and sizes of vehicle exhaust pipes. The arrester requires zero maintenance. The spark arrester is to be installed horizontally.

Product Description:

- Available in light & heavy duty
- Color: Yellow
- Size: 1.5" x 2" x 2.5", 3" x 3.5" x 4" etc.
- Mandatory to use highly sensitive areas
- Application: Required in gas, vapor or dust hazardous area applications such as mining, surface or off-shore processes
- Spark arresters play a critical role in the prevention of wild and fire ignition of explosive atmospheres.



Flashlight with Battery

Product Description

- Unit Information :- Model #: 2206 LED
- Unit Dimensions :- Length: 8.2 in. (20.9 cm) X Width: 4.9 in. (12.4 cm) X Height: 5.6 in. (14.2 cm)
- Specifications :- Power Source: 4 x 'D' Cell Alkaline
- Light Source: LED , Life: 30,000 hrs , Runtime: 150 hrs
- Light Output: 90 Lumens

Product Features

- For use in hazardous atmospheres
- Waterproof, IP 67 rating
- 'D' Cell Alkaline Batteries
- Switch Guard protects switch on impact
- Glove friendly handle

Safety Approvals

- UL Protection Methods , UL 913 CSA C22.2 , Intrinsically Safe , Divisions 1 & 2
- Class I, II, III Div 1 Groups A-G
- Class I, II, III Div 2 Groups A-G
- Operating Temp T5



2206 LED

Worksafe Flashlight

The WorkSafe Flashlight can be used in hazardous atmospheres and carries a 150 hour runtime.

Product Description

- Intrinsically Safe
- Waterproof, IP67 Rating
- D Cell Alkaline Batteries
- Switch Guard protects switch on impact
- Glove friendly handle

The LED technology significantly increased light output and run-time.

The intrinsically safe certification on these lights gives you the absolute confidence to use our lights in the most hazardous environments without concern of any safety issues.




2217 LED





Scan QR code to
download catalogues

MARK SAFETY APPLIANCES

 **Regd. Office, Warehouse & Workshop:**
Plot No. 92, 93, Shah Industrial Park-3 at Kotambi,
Pin Code 391510, Vadodara-Halol Highway,
Dist. Vadodara, Gujarat, India.

 02668 299065, 098797 79661

 info@marksafety.com

 www.marksafety.com

Connect us:     